

CMR4-XT Series Overview

Description

Cosmau CMR4-XT series multiple passage rotary unions with 4 channel for media transfer, design for compressed air, gas in rotating system.

- Transmit compressed air, gas when 360° unrestricted rotation
- Combined with electrical slip ring, transfer power, control signal, data
- Through hole or flange structure optional
- Low torque



Specifications

Item	
Pneumatic Channel	4
Pressure	-100kPa ~ 10bar
Connection Size	M5, 1/8" 1/4", 3/8"
Connection Type	BSPB
Operating Temperature	-18° C to 120° C
Suitable Media	Air / Gas / Vacuum
Speed	200 RPM (reference value)
Material	AL alloy housing, Carbon Steel Shaft
Service life	80 million rotations

Note: All values listed under Technical Specifications are dependent on a combination of all application parameters. Please note service life is dependent upon both rotational speed and duty cycle.

Options


- Mounting Flange
- Connection Size
- Connection Type
- Material
- Pressure
- Media
- Optional Speed
- Combine with electrical slip ring

INTRODUCE

CMR4-XT

5

CMR4-XT Series Dimensions

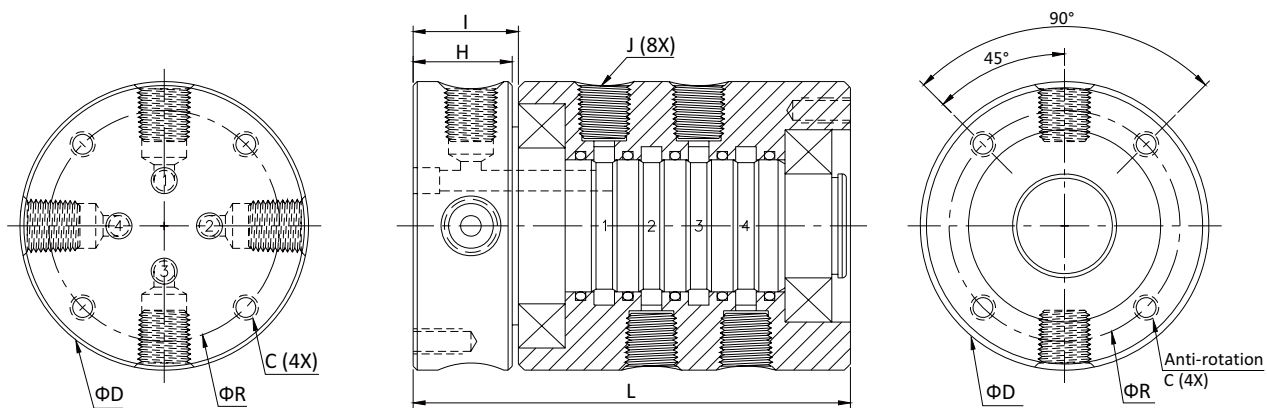

Part#	J(BSPP/NPT)	ΦR	C	ΦD	H	I	L
CMR-400-XT	M5	36	M4	44	14.5	15	82
CMR-401-XT	1/8"	45	M5	54	18.5	19.5	95.9
CMR-402-XT	1/4"	50	M5	59	21.5	22.5	102.9
CMR-403-XT	3/8"	59	M6	69	27.5	28.5	119.9